



# SKID STEER ATTACHMENT RANGE

Committed to providing solutions for every application



## 30 attachment ranges for the World's safest skid steer

### Whatever the job, whatever the season

JCB's new range of more than 30 types of attachments gives you ultimate versatility. From buckets to breakers and snow ploughs to patch planers, an optional 7-way multifunction joystick allows you to easily use any of them to their full potential. This means you can use your New Generation JCB skid steer all year round from landscaping to snow clearing. For ultimate convenience, a hydraulic quick hitch option lets you change attachments without leaving your cab. Alternatively, a mechanical quick hitch system is offered as standard. And whichever attachments you choose, you can rest assured they've been designed to strenuous JCB standards and built to match your machine.

### Safety is our priority

The safety of the skid steer owner is paramount and while attachments are essential to increasing a skid steer's utilization, they can also prove to be a hazard. That's why the JCB skid steer's unique side entry door means you no longer have to clamber over them to get in through the front window. Thanks to JCB's unique PowerBoom design, JCB New Generation skid steers also offer an unparalleled 270 degree visibility, 60% more than ordinary skid steers. And with a cab that's 33% bigger and quieter than any other skid steer plus best in class serviceability, the JCB skid steers and attachment range truly are the complete solution.



# SKID STEER ATTACHMENT RANGE

<p>AUGERS</p> 	<p>BREAKERS</p> 	<p>BROOMS, SWEEPER COLLECTOR</p> 	<p>BROOMS, ANGLE</p> 	<p>BRUSH CUTTERS</p> 	<p>BUCKETS, 6 IN1 MULTIPURPOSE</p> 
<p>BUCKETS, GENERAL PURPOSE</p> 	<p>BUCKETS, LANDSCAPE</p> 	<p>BUCKETS, LIGHT MATERIAL</p> 	<p>BUCKETS, SNOW</p> 	<p>COLD PLANERS</p> 	<p>DOZER BLADES</p> 
<p>FORKS, PALLET</p> 	<p>FORKS, MANURE</p> 	<p>FORESTRY CUTTING HEADS</p> 	<p>GRAPPLES, BRUSH</p> 	<p>GRAPPLES, SCRAP</p> 	<p>GRAPPLES, FORKED SCRAP</p> 
<p>RAKES, AUTO</p> 	<p>RAKES, LANDSCAPE POWER</p> 	<p>RAKES ,LANDSCAPE PREPARATOR</p> 	<p>ROCK SAWS</p> 	<p>SILAGE DEFACERS</p> 	<p>SNOW BLADES</p> 
<p>SNOW BLOWERS</p> 	<p>STUMP GRINDERS</p> 	<p>TILLERS</p> 	<p>TREE SPADES</p> 	<p>TRENCHERS</p> 	<p>VIBRATORY ROLLERS</p> 



### AUGERS

- JCB augers provide high torque allowing you to drill with speed and precision in the toughest of ground conditions.
- Heavy duty planetary gear reduction design provides long life with minimal service and maintenance costs.
- The auger drive unit is completely sealed in an oil bath for continuous lubrication.
- Standard & High Flow models are available with a wide range of auger bits to suit various applications.



### BROOMS, ANGLE BROOM

- JCB angle brooms provide clean up solutions for a variety of applications including street & parking lot maintenance, construction and industrial site clean-up, or snow removal.
- Manual or Hydraulic angle adjustment allows 30° angle left or right.
- 32" diameter wire and poly brush construction provides long life.
- 72" and 84" models are available.



### BREAKERS

- JCB breakers feature outstanding impact energy and compact construction for class leading power to weight performance.
- Silenced design as standard for quieter operation.
- Sealed for life accumulator reduces service costs.
- Stainless steel piston eliminates corrosion and offers greater protection to the seals.
- Large diameter tools make greater use of the impact energy for increased productivity.



### BRUSH CUTTERS

- The JCB brush cutter mulches tall grass, brush and small trees up to 4" in diameter.
- High-speed, dual rotation blades provide high performance cutting.
- Features side discharge with flow control baffle and stump jumper to protect gear box from unexpected impacts.
- Models include 72" or 78" cutting width. Standard and High Flow configurations are available.



### BROOMS, SWEEPER COLLECTOR

- JCB sweeper collectors make easy work of site clean up by sweeping, collecting, and dumping dirt and debris.
- High power direct drive motors deliver excellent torque for greater performance.
- Large bucket capacities allow for extended operation before emptying is required.
- Optional gutter brush for curb clean up & water kit for dust suppression are also available.



### BUCKETS, 6 IN 1 MULTIPURPOSE

- JCB multi-purpose buckets bring increased versatility and productivity to your job site.
- Dig, Load, Spread, Grade, Grab and Doze - all with one tool.
- Long floor design for excellent visibility to cutting edge.
- Constructed of high tensile material for reduced weight and higher strength.
- Range of sizes and capacities from 66" to 84" wide ; pre-drilled to accept cutting edge or toothbar.

# ATTACHMENT RANGE



### BUCKETS, DIRT / GENERAL PURPOSE

- Designed with a shorter bucket floor to provide maximum breakout forces while maintaining great visibility to the edge.
- High strength steel construction and high tensile side cutters to the front of the bucket provide strong front edge support.
- Pre-drilled to accept cutting edge or tooth bar.
- Range of sizes and capacities from 66" to 84" wide.



### BUCKETS, LANDSCAPE

- The long bucket floor and low back design offers higher capacities and provides excellent visibility to the cutting edge.
- Great for carrying and loading materials as well as leveling and grading applications.
- Pre-drilled to accept cutting edge or tooth bar.
- Range of sizes and capacities from 66" to 84" wide.



### BUCKETS, LIGHT MATERIAL

- Ideal for moving large amounts of light weight material such as mulch, grain or feed.
- Rolled inside design allows for easy clean out.
- Wear plating across bottom prevents damage to bucket floor.
- Variety of sizes available ranging 75" to 96" with capacity from 20 to 54 cubic feet.



### BUCKETS, SNOW

- JCB snow buckets allow you to efficiently move large volumes of snow and other loose materials.
- The cut out back plate provides greater visibility to the front edge of the bucket.
- JCB snow bucket are available in both medium duty and heavy duty versions ranging from 84" to 96" wide.
- Range of capacities available from 1.4 to 2.7 cu yd.



### COLD PLANERS

- JCB planers provide milling solutions for damaged concrete or asphalt surfaces caused by frost heaves, cracks or potholes.
- All models feature electro-hydraulic adjustment of side shift, tilt, and depth functions with the JCB Multi-function controls.
- The planetary drive unit provides high torque to the drum for maximum productivity.
- Six models are available including one Standard Flow and five High Flow versions ranging from 12" to 40" wide.



### DOZER BLADES

- The JCB dozer blade will convert your skid steer or track loader into a compact bulldozer.
- Tilt and angle functions are easily adjusted during operation with the JCB Multi-function controls.
- Blade angles 30 degrees left or right of center with 10 degrees of tilt up or down from horizontal.
- Available in 84" and 96" wide models.



### FORKS, PALLET

- Pallet forks allow you to handle palletized items and various construction materials with ease.
- Heavy duty rail style forks with locking position pins provide adjustable tine spacing.
- Heavy gauge load guard provides excellent see through visibility while the smooth surface prevents damage to the load.
- Available in 42" and 48" fork tine lengths.



### GRAPPLES, BRUSH

- Brush grapples are ideal for removing brush and limbs in site preparation jobs or removing debris in clean up applications.
- Debris and brush are easily removed while dirt stays on site by falling between the tines.
- Heavy duty construction and cylinder guards for increased protection and durability in harsh applications.
- Available in 72, 78, and 84 inch wide models.



### FORKS, MANURE

- The manure fork with grapple is ideal for handling hay and manure as well as cleaning up brush and limbs.
- Grapple clamps hold load in place, reducing spillage while transporting material.
- Designed to provide great visibility to end of fork tines.
- Available in 72" and 84" versions.



### GRAPPLES, SCRAP

- The scrap grapple is an excellent tool for handling irregular shaped materials in construction and industrial applications.
- The solid bottom bucket and dual, independent clamp design holds trash, scrap and bulky materials securely in place.
- Heavy duty construction and cylinder guards provide increased protection and durability in harsh applications.
- Available in 76 and 82 inch wide models.



### FORESTRY CUTTING HEADS

- The powerful JCB forestry cutter shreds and mulches hardwood trees up to 8 inches in diameter.
- Extreme-duty design utilizes a high output variable displacement motor for maximum productivity.
- Hydraulically adjustable deflector door provides control of material discharge and processing size.
- In-line hydraulic oil cooler reduces heat in the hydraulic system for efficient operation.



### GRAPPLES, FORKED SCRAP

- Forked scrap grapples provide easy removal of brush, refuse and other loose materials, while dirt falls away between the tines.
- Grapples operate independently to handle uneven loads.
- 2-1/4 inch Heavy Duty round tines and 3/8 inch thick end plates for strength in demanding applications.
- Available in 66, 72, 78, and 84 inch wide models.



### RAKES, LANDSCAPE POWER

- The landscape power rake lets you prepare the ideal seedbed in preparation for seed or sod.
- Operates in forward and reverse allowing quick seedbed preparation.
- Angles 20 degrees for windrowing debris to the left or right.
- Other applications include grading & shaping, reconditioning hard soil, drying out muddy job sites and trench restoration.
- Models include 72", 84, and 90" raking widths.



### RAKES, AUTO

- The auto rake levels, grooms and finishes the soil while breaking up clods for seeding and sodding applications.
- Rocks ranging from 3/4" to 6" in diameter are picked up and collected in the hopper.
- Debris is dumped quickly by raising the loader arms and opening the hydraulically operated front shroud.
- Available in 66" and 76" raking widths.



### RAKES, LANDSCAPE PREPARATOR

- The preparator rake is a versatile landscape tool that tills and prepares soil for seeding while picking up rocks and debris.
- Bi-directional drum tills up to 2-1/2 deep and allows operation in forward or reverse for increased productivity.
- The perforated bucket collects debris and rocks from 1" to 20" while soil is sifted through the bucket floor.
- Models included 66" and 76" raking widths.



### ROCK SAWS

- The JCB rock saw allows you to perform slot cutting in pavement and asphalt for utility applications such as gas, water, sewer, and electrical installations or repair.
- The high output steel planetary drive delivers high torque for excellent productivity.
- Hydraulically adjusted depth and side shift functions are easily operated from inside the cab with the JCB Multi-function controls.



### SILAGE DEFACERS

- The JCB silage defacer quickly and efficiently loosens and removes silage from compacted bunkers.
- Maintains smooth compacted bunker face to reduce spoilage.
- The open frame design provides great visibility to the face of the bunker and the inboard mounted motor allows cutting next to adjacent bunker walls.
- Provides a 96" wide cutting width.



### SNOW BLOWERS

- The JCB snow blower range features 2 stage design with the ability to throw snow as far as 45 feet.
- A poly-lined chute and deflector are easily adjusted to direct the snow discharge using the JCB Multi-function controls.
- The 25 inch (Standard Flow) and 36 inch (High Flow) shroud openings allow high volumes of snow to be moved quickly.
- Available in 72", 78" and 84" working width models.



### SNOW BLADES

- For quick and easy snow clean up, the JCB snow blade allows you to efficiently clear snow from sidewalks, driveways, and parking lots.
- JCB Snow Blades can be angle up to 30 degrees left or right.
- Features include adjustable skid shoes, replaceable wear edge and spring loaded trip protection mechanism.
- Available in both Heavy Duty and Standard Duty models with either manual or hydraulic angle adjustment. Nine models from 72" to 120".



### TREE SPADE

- The ideal attachment for landscaping, nursery and municipal applications, the Tree Spade can dig, load and transplant trees with ease.
- The inside frame design with 25 degree cutting angle allows operation in confined areas and aids in compressing the tree ball into the basket.
- Able to produce several uniform ball sizes with one set of blades.
- Three models available to accommodate root ball diameters from 26 to 44 inches or tree calipers between 1 to 4.5 inches.



### STUMP GRINDER

- Eliminate the hard work of stump removal with the JCB stump grinder attachment.
- 60 degrees of swing arc allows the operator to cover a large cutting area in a single pass for quick stump removal.
- The offset mounted swing arm design provides excellent visibility to the cutting area.
- Available in both High Flow or Standard Flow models.



### TRENCHER

- JCB offers high flow and standard flow models in 36" or 48" dig depths to suit various trenching applications.
- High torque hydraulic motors provide maximum digging power for excellent productivity.
- Side shift feature allows trenching next to walls or structures and single side spoil auger permits working in confined spaces.
- Low profile design for excellent visibility to the trench.



### TILLERS

- A JCB tiller allows you to quickly break up ground and mix soil, compost and other materials in landscaping applications.
- The bi-directional operation allows you to till the ground in forward and reverse so you can complete the job in less time.
- The JCB tiller has a dual hitch design allowing center mount or offset mount for operating next to buildings or other objects.
- Available in 66" and 78" High Flow models.



### VIBRATORY ROLLER

- Compact sand, soil, gravel, or crushed stone in preparation for concrete or asphalt surfacing with JCB vibratory rollers.
- Produces up to 9,370 lbs of dynamic force for excellent compaction.
- Features 15 degrees of oscillation for compaction on uneven terrain.
- Adjustable scraper blade for smooth and uniform compaction.
- Available in either smooth drum for granular soil types and asphalt patch work or pad foot drum for wet soil or clay type applications.

MODEL	ITEM	260	280	300	330	260T	300T	320T
<b>AUGERS</b>								
PASF	Planetary Drive Auger - Standard Flow	•	•	•	•	•	•	•
PAHF	Planetary Drive Auger - HIGH FLOW	•	•	•	•	•	•	•
<b>BREAKERS</b>								
HM265Q	HM265Q (includes Chisel & Moil)	•	•	•	•	•	•	•
HM386Q	HM386Q (includes Chisel & Moil)	•	•	•	•	•	•	•
<b>BROOMS, SWEEPER COLLECTOR</b>								
SC180	72" Pick-Up Sweeper	•	•	•	•	•	•	•
SC214	82" Pick-Up Sweeper	•	•	•	•	•	•	•
<b>BROOMS, ANGLE</b>								
BR72	Angle broom - 72" wide	•	•	•				
BR84	Angle broom - 84" wide	•	•	•	•	•	•	•
<b>BRUSH CUTTERS</b>								
BC72	72" Brush Cutter - Standard Flow	•	•	•	•	•	•	•
BC72HF	72" Brush Cutter - HIGH FLOW	•	•	•	•	•	•	•
BC78HF	78" Brush Cutter - HIGH FLOW	•	•	•	•	•	•	•
<b>BUCKETS , 6 IN I</b>								
MPB66	66" - 6 in I Multipurpose Bucket / 15.8 cu. ft. Capacity	•	•	•				
MPB72	72" - 6 in I Multipurpose Bucket / 17.2 cu. ft. Capacity	•	•	•				
MPB78	78" - 6 in I Multipurpose Bucket / 21.7 cu. ft. Capacity	•	•	•	•	•	•	•
MPB84	84" - 6 in I Multipurpose Bucket / 23.4 cu. ft. Capacity	•	•	•	•	•	•	•
<b>BUCKETS , DIRT / GENERAL PURPOSE</b>								
DB66	66" Dirt/GP Bucket / 14.1 cu. ft. Capacity	•	•	•				
DB72	72" Dirt/GP Bucket / 15.4 cu. ft. Capacity	•	•	•				
DB78	78" Dirt/GP Bucket / 16.7 cu. ft. Capacity	•	•	•	•	•	•	•
DB84	84" Dirt/GP Bucket / 18.1 cu. ft. Capacity	•	•	•	•	•	•	•
<b>BUCKETS, LANDSCAPE</b>								
LSB66	66" Landscape Bucket / 17.5 cu. ft. Capacity	•	•	•				
LSB72	72" Landscape Bucket / 19.2 cu. ft. Capacity	•	•	•				
LSB78	78" Landscape Bucket / 20.9 cu. ft. Capacity	•	•	•	•	•	•	•
LSB84	84" Landscape Bucket / 22.7 cu. ft. Capacity	•	•	•	•	•	•	•

MODEL	ITEM	260	280	300	330	260T	300T	320T
<b>BUCKETS, LIGHT MATERIAL</b>								
LMB75	75" High Capacity / Light Material Bucket / 21 cu. ft. Capacity	•	•	•	•			
LMB84	84" High Capacity / Light Material Bucket / 26.8 cu. ft. Capacity	•	•	•	•	•	•	•
HCB84	84" Extra High Capacity / Light Material Bucket / 43.9 cu. ft. Capacity	•	•	•	•	•	•	•
HCB96	96" Extra High Capacity / Light Material Bucket / 54 cu. ft. Capacity	•	•	•	•	•	•	•
<b>BUCKETS, SNOW</b>								
MSB84	84" Medium Duty Snow Bucket / 30.8 cu. ft. Capacity	•	•					
MSB96	96" Medium Duty Snow Bucket / 35.4 cu. ft. Capacity	•	•					
HSB96	96" Heavy Duty Snow Bucket / 49.4 cu. ft. Capacity	•	•	•	•	•	•	•
HSB108	108" Heavy Duty Snow Bucket / 55.9 cu. ft. Capacity	•	•	•	•	•	•	•
<b>COLD PLANERS</b>								
CP1212"	Cold Planer - Standard Flow	•	•	•	•	•	•	•
CP16HF	16" Cold Planer - HIGH FLOW	•	•	•	•	•	•	•
CP18HF	18" Cold Planer - HIGH FLOW	•	•	•	•	•	•	•
CP24HF	24" Cold Planer - HIGH FLOW	•	•	•	•	•	•	•
CP30HF	30" Cold Planer - HIGH FLOW						•	•
CP40HF	40" Cold Planer - HIGH FLOW				•			•
<b>DOZER BLADES</b>								
HDB84	84" Dozer Blade - 6 Way Hydraulic	•	•	•	•	•	•	•
HDB96	96" Dozer Blade - 6 Way Hydraulic			•	•	•	•	•
<b>FORKS, PALLET</b>								
PF42	Pallet Fork Frame, Load backrest and 42" Tines	•	•	•	•	•	•	•
PF48	Pallet Fork Frame, Load backrest and 48" Tines	•	•	•	•	•	•	•
<b>FORKS, MANURE</b>								
MFG72	72" Manure Forks with Top Grapple	•	•					
MFG84	84" Manure Forks with Top Grapple	•	•	•	•	•	•	•
<b>FORESTRY CUTTING HEADS</b>								
FC60HF	60" Forestry Cutting Head - HIGH FLOW - **Requires Additional Guarding**	•	•	•	•	•	•	•
FC72HF	72" Forestry Cutting Head - HIGH FLOW - **Requires Additional Guarding**			•	•		•	•
<b>GRAPPLES, BRUSH</b>								
HGB72	72" Heavy Duty Brush Grapple	•	•	•				
HGB78	78" Heavy Duty Brush Grapple	•	•	•	•	•	•	•
HGB84	84" Heavy Duty Brush Grapple	•	•	•	•	•	•	•

MODEL	ITEM	260	280	300	330	260T	300T	320T
<b>GRAPPLES, SCRAP</b>								
HSG76	76" Heavy Duty Scrap Grapple	•	•	•	•			
HSG82	82" Heavy Duty Scrap Grapple	•	•	•	•	•	•	•
<b>GRAPPLES, FORKED SCRAP</b>								
FSG66	66" Heavy Duty Forked Scrap Grapple	•	•	•				
FSG72	72" Heavy Duty Forked Scrap Grapple	•	•	•				
FSG78	78" Heavy Duty Forked Scrap Grapple	•	•	•	•	•	•	•
FSG84	84" Heavy Duty Forked Scrap Grapple	•	•	•	•	•	•	•
<b>RAKES, LANDSCAPE POWER</b>								
PRM72	72" Landscape Power Rake with Manual Angle	•	•	•	•	•	•	•
PRH72	72" Landscape Power Rake with Hydraulic Angle	•	•	•	•	•	•	•
PRM84	84" Landscape Power Rake with Manual Angle	•	•	•	•	•	•	•
PRH84	84" Landscape Power Rake with Hydraulic Angle	•	•	•	•	•	•	•
PRM90	90" Landscape Power Rake with Manual Angle	•	•	•	•	•	•	•
PRH90	90" Landscape Power Rake with Hydraulic Angle	•	•	•	•	•	•	•
<b>RAKES, AUTO</b>								
AR66	66" Auto Rake - Standard Flow	•	•	•	•			
AR76	76" Auto Rake - Standard Flow	•	•	•	•	•	•	•
<b>RAKES, LANDSCAPE PREPARATOR</b>								
LSP66	66" Landscape Preperator - Standard Flow	•	•	•	•	•	•	•
LSP76	76" Landscape Preperator - Standard Flow	•	•	•	•	•	•	•
<b>ROCK SAWS</b>								
RS18HF	Rock Saw - 18" Depth - HIGH FLOW	•	•	•	•	•	•	•
RS24HF	Rock Saw - 24" Depth - HIGH FLOW			•	•		•	•
<b>SILAGE DEFACER</b>								
SD96	96" Silage Defacer - Standard Flow	•	•	•	•	•	•	•
<b>SNOW BLOWERS</b>								
SBL72	72" Snow Blower - Standard Flow	•	•	•				
SBL78	78" Snow Blower - Standard Flow	•	•	•	•	•	•	•
SBL84	84" Snow Blower - Standard Flow	•	•	•	•	•	•	•
SBL72HF	72" Snow Blower - HIGH FLOW	•	•	•				
SBL78HF	78" Snow Blower - HIGH FLOW	•	•	•	•	•	•	•
SBL84HF	84" Snow Blower - HIGH FLOW	•	•	•	•	•	•	•

MODEL	ITEM	260	280	300	330	260T	300T	320T
<b>SNOW BLADES</b>								
SBM72	72" Snow Blade - Manual Angle	•	•					
SBM84	84" Snow Blade - Manual Angle	•	•					
SBM96	96" Snow Blade - Manual Angle	•	•					
SBH72	72" Snow Blade - Hydraulic Angle	•	•					
SBH84	84" Snow Blade - Hydraulic Angle	•	•					
SBH96	96" Snow Blade - Hydraulic Angle	•	•					
HSB96	96" Heavy Duty Snow Blade - Hydraulic Angle	•	•	•	•	•	•	•
HSB108	108" Heavy Duty Snow Blade - Hydraulic Angle	•	•	•	•	•		
HSB120	120" Heavy Duty Snow Blade - Hydraulic Angle	•	•		•	•		
<b>STUMP GRINDERS</b>								
SGS26	Stump Grinder - 26" Wheel Diameter / Standard Flow	•	•	•	•	•	•	•
SG30HF	Stump Grinder - 30" Wheel Diameter / HIGH FLOW	•	•	•	•	•	•	•
<b>TILLERS</b>								
TLR66HF	66" Tiller - 6 inch tines - HIGH FLOW	•	•	•	•	•	•	•
TLR78HF	78" Tiller - 6 inch tines - HIGH FLOW	•	•	•	•	•	•	•
<b>TREE SPADES</b>								
TS26	Tree Spade with Blades / 25 degree cutting angle / 18" - 26" ball diameter					•	•	•
TS36	Tree Spade with Blades / 25 degree cutting angle / 24" - 36" ball diameter					•	•	•
TS44	Tree Spade with Blades / 25 degree cutting angle / 32" - 44" ball diameter					•	•	•
<b>TRENCHERS</b>								
TR36	36" Trencher - Standard Flow	•	•	•	•	•	•	•
TR48	48" Trencher - Standard Flow	•	•	•	•	•	•	•
TR48HF	48" Trencher - HIGH FLOW	•	•	•	•	•	•	•
<b>VIBRATORY ROLLERS</b>								
VR73S	73" Vibratory Roller - Smooth Drum	•	•	•	•	•	•	•
VR84S	84" Vibratory Roller - Smooth Drum	•	•	•	•	•	•	•
VR73P	73" Vibratory Roller - Padded Drum	•	•	•	•	•	•	•
VR84P	84" Vibratory Roller - Padded Drum	•	•	•	•	•	•	•

# ATTACHMENT SPECIFICATIONS

## AUGERS

### SPECIFICATIONS

	PASF	PAHF	
Hyd. Flow Range			
Min - GPM (lpm)	10 (38)	28 (106)	
Max - GPM (lpm)	25 (94)	40 (151)	
Max. Continuous operating pressure - PSI (bar)	3340 (230)	3340 (230)	
Max. Auger Diameter - inches (mm)	30"	48"	
Output Shaft	2" Hex	2" Hex	
Weight - lbs (kg)	407 (185)	536 (243)	
Output Speed :	GPM (lpm)	RPM	RPM
	10 (38)	38	-
	16 (60)	60	-
	25 (94)	94	-
	28 (106)	-	59
	34 (129)	-	72
	40 (151)	-	85
Output Torque:	PSI (bar)	Lb-Ft	Lb-Ft
	2000 (138)	1600	-
	2500 (172)	2000	3620
	3000 (207)	2377	4345
	3500 (241)	-	5096

### FEATURES

- Sealed planetary gear reduction with heavy duty gear design provides long life and minimal maintenance with low service costs.
- Drive units are completely sealed with all moving components operating in oil for constant lubrication .
- Reverse rotation for quick back out and aids in shedding material from auger the bit.
- Hydraulic relief valve protects the unit from damage if auger comes in contact with a large immovable object.
- Available in both low flow & high flow models with a wide range of auger bits for various applications.



#### Available Auger Bits include:

#### STANDARD DUTY BITS: (For light to moderate ground conditions)

Width	6"	9"	12"	15"	18"	24"	30"	36"
# of teeth	2	3	4	5	6	8	9	11

#### HEAVY DUTY BITS: (For difficult ground conditions, compacted soil, heavy clay, asphalt, and frozen ground)

Width	6"	9"	12"	15"	18"	24"	30"	36"
# of teeth	2	4	4	6	6	8	10	12

#### TREE & SHRUB BITS: (For tree and shrub planting)

Width	18"	24"	30"	36"
Pilot Diameter	9"	12"	15"	18"
# of teeth	7	10	11	13

## BREAKERS

### SPECIFICATIONS

	HM265Q	HM386Q
Operating Weight - lbs (kg)	440 (200)	795 (361)
Impact Energy - ft./lb. (J)	381 (516)	611 (828)
Blow Rate / Min-Max - bpm	480 - 1200	720 - 1380
Carrier Weight / Min-Max in tonnes	2.8 - 6.0	4.5 - 9.0
Oil Flow Required / Min-Max (gpm)		
Min - GPM (lpm)	8 (30)	16 (60)
Max - GPM (lpm)	17 (64)	26 (98)
Sound Power Level (dba)	128	121

### FEATURES

- JCB breakers feature outstanding impact energy and compact construction for class leading power to weight performance.
- Sealed for life accumulator means the accumulator only needs recharging upon a full rebuild service; reducing maintenance costs.
- Accumulator diaphragm support protects against wear, resulting in extended seal life.
- Internal Helicoil bolt system is much more robust and durable than traditional tie bolt and can withstand much greater flexing without failing.
- Solid body design offers less sealing and joint lines than the traditional design and is therefore less prone to hydraulic leaks.
- Stainless steel piston eliminates corrosion and offers greater protection to the seals.
- Simple tool lock enables quick tool changeover.
- Oval double tool retainers reduce tool rotation extending tool and bush life.



## BROOMS, SWEEPER COLLECTOR

### SPECIFICATIONS

	SC180	SC214
Total Width (inches)	80 (2022)	92.5 (2350)
Working Width (inches)	72 (1850)	96 (2140)
Height	24 (615)	24 (615)
Length	52 (1329)	52 (1329)
Weight	970 (440)	1000 (455)
Hopper Capacity (cu ft)	17.6 (0.5)	21 (0.6)
Flow Requirement (gpm)	20 (76)	20 (76)
Brush Diameter (inches)	23 (590)	23 (590)
Number of Brush Segments	40	50
Brush Material	50% Poly / 50% wire	

### FEATURES

- 50/50 Poly Wire brush segments for long term durability.
- Heavy duty one piece canopy for superior structural strength
- Floating mounting frame allows sweeper to follow contour of the ground.
- Operate in forward or reverse direction increasing productivity
- Optional Water Kit and Gutter Brush available



## BROOM , ANGLE

### SPECIFICATIONS

	BR72	BR84
Overall Width		
Straight - in.(mm)	86.8 (2204)	98.8 (2509)
Full 30 Degree Angle - in. (mm)	85.6 (2174)	96 (2438)
Sweeping Width		
Straight - in.(mm)	71 (1803)	83 (2108)
Full 30 Degree Angle - in. (mm)	62 (1575)	72 (1828)
Overall Length		
Straight - in.(mm)	71 (1803)	71 (1803)
Full 30 Degree Angle - in. (mm)	79.5 (2019)	82.5 (2095)
Weight - lbs (kg)	165 (363)	175 (384)
Hyd. Flow Range		
Min - GPM (lpm)	12 (45.5)	12 (45.5)
Max - GPM (lpm)	25 (94)	25 (94)
Max. operating pressure - PSI (bar)	3340 (230)	3340 (230)

### FEATURES

- 32" Diameter poly/wire brush provides long-term durability.
- Fold away storage stands protects bristles from flattening when not in use.
- Bristle replacement is simplified as the drive motor detaches from the core without having to disconnect hydraulic lines.
- Reinforced hood design provides maximum strength at the end of the hood where high stress may occur.
- Broom angles 30 degrees left or right. (Hydraulic angle option available)
- Available in 72 inch and 84 inch wide models.



\*Hydraulic Angle Option requires JCB Multi-Function Controls

## BRUSH CUTTER

### SPECIFICATIONS

	BC72	BC72HF	BC78HF
Overall Height -in.(mm)	22.5 (571)	22.5 (571)	22.5 (572)
Overall Width - in. (mm)	85 (2159)	85 (2159)	91 (2311)
Overall Length - in. (mm)	90 (2291)	90 (2291)	96 (2438)
Cutting Width - in. (mm)	72 (1829)	72 (1829)	78 (1981)
Minimum Cutting Height (skid shoes on ground)	2 (50)	2 (50)	2 (50)
Deck Height - in. (mm)	9 (228)	9 (228)	9 (228)
Max Cutting Diameter in. (mm)	4 (101)	4 (101)	4 (101)
Weight - lbs (kg)	1610 (730)	1610 (730)	1666 (755)
Recommended Hyd. Flow Range			
Min - GPM (lpm)	18 (68)	32 (121)	32 (121)
Max - GPM (lpm)	22 (83)	40 (151)	40 (151)
Max Oper. Pressure-PSI (bar)	3340 (230)	3340 (230)	3340 (230)

### FEATURES

- High speed, dual rotation blades cuts and mulches heavy brush up to 4 inches in diameter
- High deck clearance and unobstructed deck design prevents debris build up and improves overall performance
- Access ports and hinged shrouding allow for easy routine maintenance.
- Blade-stall indicator allows the operator to monitor blade speed.
- Heavy duty 1/4" (6mm) steel deck with re-inforced side plates provide high strength & durability
- Stump jumper feature provides added protection to gearbox in the event of a sudden impact



## BUCKETS

### DIRT / GP



Shorter bucket floor provides maximum breakout forces with great visibility to the cutting edge.

### LANDSCAPE



Low back and longer bucket floor provide excellent visibility to cutting edge, while maintaining high breakout forces

### MULT-PURPOSE



6 in 1 Multipurpose bucket lets you Dig, Load, Spread, Grade, Grab and Doze - all with one tool

### LIGHT MATERIAL



High Capacity buckets for transporting Light Weight Materials

### SNOW BUCKET



High volume buckets for snow removal with cut out back plate for good visibility to bucket edge

Bucket	Width inches (mm)	Length inches / (mm)	Height inches / (mm)	Wt lbs / (kgs)	Heaped Cap cu. ft. / (m <sup>3</sup> )
<b>DIRT / GENERAL PURPOSE</b>					
DB66	66 (1676)	32.8 (833)	20.5 (521)	441 (200)	13.9 (0.39)
DB72	72 (1829)	32.8 (833)	20.5 (521)	471 (213)	15.2 (0.43)
DB78	78 (1981)	32.8 (833)	20.5 (521)	540 (245)	16.5 (0.47)
DB84	84 (2133)	32.8 (833)	20.5 (521)	573 (260)	17.8 (0.5)
<b>LANDSCAPE</b>					
LSB66	66 / (1676)	38.8 (986)	20.5 (521)	479 (217)	17.2 (0.48)
LSB72	72 (1829)	38.8 (986)	20.5 (521)	511 (232)	18.9 (0.54)
LSB78	78 (1981)	38.8 (986)	20.5 (521)	582 (264)	17.2 (0.49)
LSB84	84 (2133)	38.8 (986)	20.5 (521)	615 (276)	22.3 (0.63)
<b>MULTI-PURPOSE</b>					
MPB66	66 (1676)	34.4 (874)	27.3 (693)	571 (259)	15.7 (0.44)
MPB72	72 (1829)	37.5 (953)	27.6 (701)	774 (351)	20 (0.57)
MPB78	78 (1981)	38 (965)	27.9 (709)	841 (381)	21.7 (0.64)
MPB84	84 (2133)	38 (965)	27.9 (709)	884 (401)	23.4 (0.66)
<b>LIGHT MATERIAL</b>					
LMB75	75 (1905)	36.4 (925)	24.7 (627)	633 (287)	21 (0.59)
LMB84	84 (2133)	38 (965)	25 (635)	730 (331)	26.4 (0.75)
HCB84	84 (2133)	41 (1041)	35.6 (904)	740 (336)	43.7 (1.24)
HCB96	96 (2438)	42.8 (1087)	36.3 (922)	880 (399)	55.1 (1.56)
<b>SNOW BUCKET</b>					
MSB84	84 (2133)	45.2 (1148)	31.1 (790)	740 (335)	39.7 (1.12)
MSB96	96 (2438)	45.2 (1148)	31.1 (790)	810 (367)	45.9 (1.30)
HSB96	96 (2438)	50.7 (1288)	38.8 (985)	995 (451)	63.7 (1.80)
HSB108	108 (2743)	50.7 (1288)	38.8 (985)	1055 (478)	72.1 (2.04)

## COLD PLANER



### FEATURES

- All models feature electro-hydraulic adjustment of side shift, tilt, and depth functions operated by JCB Multi-function controls.
- Independent self-leveling depth adjustment plates allow for precise lapping cuts and taper cuts.
- Hardened solid steel wheels with recessed grease zerks provide smooth travel with less rolling resistance.
- Angled spoil guard wheel design prevents wheels from riding over millings which provides more force to the planing action and maintained control over depth of cut.
- Wheels are removable allowing planing next to curbs.
- High rear spoil clearance helps prevent the recirculation of planed material.
- Depth & tilt position indicators are within easy view.
- Protective shields for hydraulic and electrical components reduce risk of damage.
- Hinged drum cover allows for easy servicing of picks. Pick maintenance tool included.

\*Requires JCB Multi-function Controls

### SPECIFICATIONS

	CP12	CP16HF	CP18HF	CP24HF	CP30HF	CP40HF
Overall Width - in. (mm)	52 (1320)	65 (1651)	65 (1651)	65 (1651)	65 (1651)	65 (1651)
Overall Height - in. (mm)	32.2 (817)	34.5 (876)	34.5 (876)	34.5 (876)	34.5 (876)	34.5 (876)
Overall Length - in. (mm)	43.9 (1115)	50.3 (1278)	50.3 (1278)	50.3 (1278)	50.3 (1278)	50.3 (1278)
Planing Width - in. (mm)	12 (305)	16 (406)	16 (406)	16 (406)	16 (406)	16 (406)
Planing Depth in. (mm)	0-5 (0-127)	0-5 (0-127)	0-5 (0-127)	0-5 (0-127)	0-5 (0-127)	0-5 (0-127)
Tilt - degrees	+/- 11°	+/- 11°	+/- 11°	+/- 11°	+/- 11°	+/- 11°
Sideshift (center to right)- in. (mm)	0-19 (0-483)	-3-22 (-76-559)	-3-22 (-76-559)	-3-22 (-76-559)	-3-22 (-76-559)	-3-22 (-76-559)
Drum Diameter - in (mm)	19 (482)	22 (559)	22 (559)	22 (559)	22 (559)	22 (559)
Weight - lbs (kg)	1500 (680)	2150 (975)	2200 (998)	2400 (1089)	2600 (1179)	3100 (1406)
Number of Picks	37	43	45	57	69	89
Hyd. Flow Range						
Min - GPM (lpm)	15 (57)	22 (83)	22 (83)	22 (83)	22 (83)	22 (83)
Max - GPM (lpm)	22 (83)	40 (151)	40 (151)	40 (151)	40 (151)	40 (151)
Operating pressure Range						
Min - PSI (bar)	2500 (172)	2500 (172)	2500 (172)	2500 (172)	2500 (172)	2500 (172)
Max - PSI (bar)	3340 (230)	3340 (230)	3340 (230)	3340 (230)	3340 (230)	3340 (230)

## DOZER BLADE

### SPECIFICATIONS

	HDB84	HDB96
Overall Width - in. (mm)	84 (2134)	96 (2438)
Overall Length - in. (mm)	36.7 (932)	36.7 (932)
Overall Height - in. (mm)	30 (759)	30 (759)
Max Angle, Left and Right	30°	30°
Working Width @ 15° angle - in (mm)	81 (2060)	92.7 (2354)
Working Width @ 30° angle - in (mm)	73 (1857)	83.5 (2121)
Cutting edge - in. (mm)	0.75x8 (19x203)	0.75x8 (19x203)
Max Tilt, Up and Down	+/- 10°	+/- 10°
Operating Weight - lbs (kg)	1365 (619)	1460 (662)

### FEATURES

- Dozer blade converts your Skid Steer or Track Loader into a compact dozer.
- Tilt and Angle functions are easily adjusted on-the-go with the JCB Multi-function controls.
- Tilt indicator is in easy view from the operator's seat.
- Large 3" diameter center pin with hardened steel bushings provide outstanding strength.
- Reversible bolt on steel cutting edge, high carbon replaceable steel skid shoe, and heavy duty cast moldboard offer long-term durability.



\*Requires JCB Multi-function Controls

## FORKS, PALLET

### SPECIFICATIONS

	PF42	PF48
Overall Height - in. (mm)	38.75 (984)	38.75 (984)
Overall Width - in. (mm)	45.75 (1194)	45.75 (1194)
Overall Length - in (mm)	51.7 (1313)	57.7 (1466)
Adjustable Tine Spacing		
Maximum - in. (mm)	45 (1143)	45 (1143)
Minimum - in. (mm)	9 (229)	9 (229)
Pallet Fork Rating (pair of tines) - lbs (kg)	6000 (2722)	6000 (2722)
Overall weight	455 (206)	480 (218)

### FEATURES

- Heavy Duty fork frame and tines rated at 6,000 lb capacity.
- Heavy gage loadguard offers superior strength while the flat surface provides protection against damaging the load.
- Loadguard design allows excellent see through visibility to the end of the forks.
- 42" or 48" Heavy Duty Fork tine options.



## FORKS, MANURE

### SPECIFICATIONS

	MFG72	MFG84
Overall Width - in. (mm)	72 (1829)	84 (2134)
Overall Height - in. (mm)	25 (635)	25 (635)
Overall Depth - in. (mm)	30 (762)	30 (762)
Grapple Opening - in. (mm)	37 (940)	37 (940)
Weight - lb (kg)	475 (215)	525 (238)

### FEATURES

- The Manure Fork with Grapple is ideal for handling hay and packed material as well as cleaning up brush and limbs.
- Top grapple clamps hold load in place, reducing spillage while transporting material.
- Designed to provide great visibility to end of fork tines.
- Available in 72" and 84" versions.



## FORESTRY CUTTING HEAD

### SPECIFICATIONS

	FC60HF	FC72HF
Overall Width - in. (mm)	73 (1854)	85 (2159)
Overall Height - in. (mm)	57.6 (1463)	57.6 (1463)
Overall Length - in. (mm)	46.3 (1176)	46.3 (1176)
Cutting Width - in. (mm)	60 (1524)	72 (1829)
Number of Cutting Hammers	45	54
Hyd. Flow Range		
Min - GPM (lpm)	30 (114)	30 (114)
Max - GPM (lpm)	60 (227)	45 (170)
Maximum Operating Pressure - PSI (bar)	4000 (276)	4000 (276)
Weight - lb (kg)	2057 (933)	2600 (1179)

### FEATURES

- Extreme-duty design utilizes a high output variable displacement piston motor with self aligning belt drive providing maximum productivity.
- Hydraulically adjustable deflector door allows control of discharge and size of processed material.
- Heavy duty adjustable push bar aids in toppling trees and offers additional protection to the carrier.
- In-line hydraulic oil cooler reduces heat in the hydraulic system for efficient operation.
- Easily viewable gauge allows operator to monitor hydraulic operating pressure.
- Designed to operate at 2000 RPM with a balanced .75 drum wall and 2.4" alloy steel shaft.
- Rotor bearings are well protected by mechanical seals.
- Models available in 60" or 72" cutting width.



\*Requires JCB Multi-function Controls

\*\*Forestry Protection Guards required .

## GRAPPLE, BRUSH

### SPECIFICATIONS

	HBG72	HBG78	HBG84
Overall Width - in. (mm)	73 (1854)	79 (2006)	85 (2159)
Grapple Open - in. (mm)	40 (1016)	40 (1016)	40 (1016)
Grapple Closed - in. (mm)	16.5 (419)	16.5 (419)	16.5 (419)
Overall Depth - in. (mm)	39 (991)	39 (991)	39 (991)
Weight - lbs (kg)	925 (420)	999 (453)	1054 (478)
Number of Tines	14	14	16

### FEATURES

- Dual, independent grapples hold irregular shaped material securely in place.
- 40" grapple opening allows for large payloads.
- 6 inch tine spacing allows dirt to sift through .
- 100,000 psi yield tine strength to handle the most demanding applications.
- Standard cylinder guards protect all cylinder components from potential damage.
- 1 - 1/4" hardened cylinder pins and 1/2" end plates for long life durability.
- 1 - 1/4" x 24" grapple pins greatly reduce torsional stress .
- Standard load check valves provide positive clamp force.



## GRAPPLE, SCRAP

### SPECIFICATIONS

	HSG76	HSG82
Overall Width - in. (mm)	77 (1956)	83 (2108)
Grapple Open - in. (mm)	40 (1016)	40 (1016)
Grapple Closed - in. (mm)	20 (508)	20 (508)
Overall Depth - in. (mm)	38 (965)	38 (965)
Weight - lbs (kg)	1081 (490)	1133 (514)

### FEATURES

- Heavy Duty design to withstand the demands of scrap handling, recycling, demolition and other harsh applications.
- Dual, independent grapples hold irregular shaped material securely in place.
- 40" grapple opening allows for large payloads.
- Standard cylinder guards protect all cylinder components from potential damage.
- 1 - 1/4" hardened cylinder pins and 1/2" end plates for long life durability.
- 1 - 1/4" x 24" grapple pins greatly reduce torsional stress.
- Standard load check valves provide positive clamp force.



## GRAPPLE, FORKED SCRAP



### FEATURES

- Forked Scrap Grapples allows easy removal of brush, refuse and other loose materials, while dirt falls through the tines.
- Grapples operate independently to handle uneven loads.
- 2-1/4 inch Heavy Duty round tines and 3/8 inch thick end plates provide strength for arduous applications.
- 42" grapple opening and 29" usable tine length allow for large payloads.

### SPECIFICATIONS

	FSG66	FSG72	FSG78	FSG84
Overall Width - in. (mm)	66 (1676)	72 (1829)	78 (1981)	84 (2134)
Overall Height - in. (mm)	17.3 (439)	17.3 (439)	17.3 (439)	17.3 (439)
Overall Depth - in. (mm)	40.5 (1028)	40.5 (1028)	40.5 (1028)	40.5 (1028)
Grapple Opening - in. (mm)	42.5 (1079)	42.5 (1079)	42.5 (1079)	42.5 (1079)
Tine Length - in. (mm)	29 (736)	29 (736)	29 (736)	29 (736)
Number of Tines	10	11	12	13
Weight - lb (kg)	1266 (574)	1300 (589)	1329 (603)	1364 (619)

## RAKES, AUTO

### SPECIFICATIONS

	AR66	AR76
Working Width - in. (mm)	63.5 (1613)	73.5 (1867)
Overall Width - in. (mm)	74 (1880)	84 (2134)
Overall Height - in. (mm)	40 (1016)	40 (1016)
Overall Depth - in. (mm)	64 (1626)	64 (1626)
Weight - lbs (kg)	1092 (496)	1200 (545)
Number of Teeth	396	462
Hopper Capacity - lbs (kg)	1390 (630)	1485 (673)
Hyd. Flow Range		
Min - GPM (lpm)	10 (38)	10 (38)
Max - GPM (lpm)	25 (94)	25 (94)
Max. Operating Pressure - PSI (bar)	3500 (241)	3500 (241)

### FEATURES

- Grooms and finishes soil in preparation for seed or sod.
- High speed rotating teeth break up clods of dirt and levels the soil.
- Collects rocks from 3/4" to 6" in diameter.
- Heavy duty design features 1 -3/4" hex drive shaft and pintle sprockets for long life and increased durability.
- Hydraulically operated hopper quickly and easily dumps collected rocks and debris.
- Single direction operation



## RAKES, LANDSCAPE POWER

### SPECIFICATIONS

	PRM72	PRH72	PRM84
Raking Width - in. (mm)	72 (1829)	72 (1829)	84 (2234)
Operating Width - in. (mm)	81 (2057)	81 (2057)	93 (2362)
Length - in. (mm)	64 (1626)	64 (1626)	64 (1626)
Angle Adjustment	Manual	Hydraulic	Manual
Maximum Angle, Left & Right	+/- 20°	+/- 20°	+/- 20°
Raking Width @ Full Angle- in. (mm)	68 (1727)	68 (1727)	79 (2007)
Tooth Roller Diameter - in. (mm)	9 (229)	9 (229)	9 (229)
Minimum Hydraulic Flow - gpm (lpm)	13 (49)	13 (49)	13 (49)
Weight - lbs (kg)	900 (408)	925 (420)	970 (440)

### FEATURES

- Purpose-designed carbide teeth provide long life and are specifically shaped to ensure best possible seedbed preparation.
- Adjustable polyurethane barrier above roller allows the operator to choose the size of material left in the seedbed.
- Bi-directional raking capability allows quick seedbed preparation.
- Ability to angle rake 20 degrees in either direction from center allowing material to be moved left or right.
- Quick & easy to remove end plates allow the power rake to perform like a box scraper.
- Dual independently adjustable wheels allows operator to adjust for skim passes for over-seeding or adjust to cut drainage grades.
- Triple-sealed and shielded bearings provide extra protection and long life.

	PRH84	PRM90	PRH90
Raking Width - in. (mm)	84 (2234)	90 (2286)	90 (2286)
Operating Width - in. (mm)	93 (2362)	100 (2540)	100 (2540)
Length - in. (mm)	64 (1626)	76 (1930)	76 (1930)
Angle Adjustment	Hydraulic	Manual	Hydraulic
Maximum Angle, Left & Right	+/- 20°	+/- 20°	+/- 20°
Raking Width @ Full Angle- in. (mm)	79 (2007)	85 (2159)	85 (2159)
Tooth Roller Diameter - in. (mm)	9 (229)	9 (229)	9 (229)
Minimum Hydraulic Flow - gpm (lpm)	13 (49)	13 (49)	13 (49)
Weight - lbs (kg)	1050 (476)	1240 (562)	1320 (599)



\*Hydraulic angle models requires JCB Multi-function Controls

## RAKE, LANDSCAPE PREPARATOR

### SPECIFICATIONS

	LSP66	LSP76
Working Width - in. (mm)	66 (1676)	76 (1930)
Overall Width - in. (mm)	75.25 (1911)	85.25 (2165)
Overall Height - in. (mm)	34.88 (886)	34.88 (886)
Overall Depth - in. (mm)	53 (1346)	53 (1346)
Weight - lbs (kg)	1340 (607)	1520 (689)
Number of Teeth	300	340
Bucket Capacity - ft³ (m³)	10.3 (0.29)	12.5 (0.35)
Hyd. Flow Range		
Min - GPM (lpm)	10 (38)	10 (38)
Max - GPM (lpm)	25 (95)	25 (95)
Operating pressure - PSI (bar)	3340 (230)	3340 (230)



### FEATURES

- Cleans up rock and debris while preparing soil for seeding and planting.
- Conditions the ground with scarifying action which can till the soil up to 2-1/2 inch deep.
- Bi-directional drum allows operation in forward or reverse for increased productivity.
- Follows the contour of the ground while picking up debris and rocks from 1 inch to 20 inches in diameter.
- Collection bucket has perforated floor allowing dirt to sift through and provides easy dumping of debris.
- Levels out ridges and ruts; removes grass in preparation for re-seeding.

## ROCK SAW

### SPECIFICATIONS

	RS18HF	RS24HF
Overall Width - in. (mm)	67 (1702)	67 (1702)
Transport Height - in. (mm)	79 (2007)	81 (2057)
Transport Length - in. (mm)	76 (1930)	86 (2184)
Max. Cutting Depth - in. (mm)	18 (457)	24 (609)
Operating Height (guide arm down) - in. (mm)	39.5 (1003)	44 (1118)
Operating Height (guide arm up) - in. (mm)	49.7 (1262)	58 (1473)
Operating Length (guide arm down) - in. (mm)	119 (3023)	132 (3353)
Operating Length (guide arm up) - in. (mm)	77 (1956)	89 (2261)
Side Shift - Center to Left - in. (mm)	2.7 (68)	2.7 (68)
Side Shift - Center to Right - in. (mm)	24 (609)	24 (609)
Spoil Removal Path - in. (mm)	34 (863)	34 (863)
Cutting Wheel Diameter - in. (mm)	48 (1219)	60 (1524)
Weight with 2.5" cutting wheel - lbs (kg)	1995 (905)	2385 (1082)
Number of Picks	42	56
Hyd. Flow Range		
Min - GPM (lpm)	29 (108)	29 (108)
Max - GPM (lpm)	35 (132)	35 (132)
Operating pressure Range		
Min - PSI (bar)	2500 (172)	2500 (172)
Max - PSI (bar)	3340 (230)	3340 (230)

### FEATURES

- Allows slot cutting in pavement or asphalt for utility applications such as gas, water, sewer, and electrical repair or installation.
- Other applications include cutting for roadway expansion joints or asphalt patch cuts.
- High output steel planetary drive delivers high torque.
- Hydraulically adjusted depth and side shift functions are easily operated from inside the cab with JCB Multi-function controls.
- Dual side discharge of material.
- Solid hardened steel wheels and greasable manifold pins.
- 18" or 24" maximum cutting depths available.



\*Requires JCB Multi-function Controls

## SILAGE DEFACER

### SPECIFICATIONS

	SD96
Overall Width - in. (mm)	96.9 (2461)
Overall Height - in. (mm)	22.7 (576)
Overall Length - in. (mm)	132.5 (3365)
Weight - lbs (kg)	922 (418)
Recommended Hyd Flow - GPM (lpm)	18 (68) to 20 (75.7)
Max. operating pressure - PSI (bar)	3340 (230)

### FEATURES

- Inverted auger cutter design loosens and removes silage from compacted bunkers.
- Open frame design provides great visibility to the face of the bunker.
- Maintains a smooth compacted bunker face to reduce spoilage and improved palatability for livestock.
- Cutting action of defacer maintains original silage cut length.
- 96" wide cutting width with inboard mounted motor allows cutting next to adjacent bunker walls.
- Cutter constructed with abrasion resistant, high strength steel for long life.
- Frame stand protects cutting rotor during storage.



## SNOW BLADES



### FEATURES

- All models feature replaceable wear edge, adjustable skid shoes and spring loaded trip mechanism.
- Standard duty models feature seven gauge steel blade construction and include locking bolts for light duty dozing applications.
- Heavy duty models feature reinforced ten gauge steel blade construction.

### SPECIFICATIONS

Standard Duty Models	Width in. (mm)	Height in. (mm)	Degree of Angle	Cut Width @ Full Angle	Weight lbs (kg)	Angle Adjustment
SBM72	72 (1829)	23 (584)	+/- 30°	62 (1575)	595 (270)	Manual
SBM84	84 (2133)	23 (584)	+/- 30°	73 (1854)	635 (288)	Manual
SBM96	96 (2438)	23 (584)	+/- 30°	83 (2108)	650 (295)	Manual
SBH72	72 (1829)	23 (584)	+/- 30°	62 (1575)	595 (270)	Hydraulic
SBH84	84 (2133)	23 (584)	+/- 30°	73 (1854)	635 (288)	Hydraulic
SBH96	96 (2438)	23 (584)	+/- 30°	83 (2108)	650 (295)	Hydraulic
Heavy Duty Models						
HSB96	96 (2438)	32 (813)	+/- 30°	83 (2108)	780 (354)	Hydraulic
HSB108	108 (2743)	32 (813)	+/- 30°	93 (2362)	850 (385)	Hydraulic
HSB120	120 (3048)	32 (813)	+/- 30°	104 (2641)	925 (420)	Hydraulic

## SNOW BLOWERS



### FEATURES

- JCB 2 Stage Hydraulic Snow Blowers are able to throw snow up to 45 feet.
- A poly-lined chute and deflector are easily adjusted to direct the snow discharge using the JCB Multi-function controls.
- The direct drive hydraulic motor design eliminates unnecessary moving components, promoting less wear and longer life.
- The 25 inch (Standard Flow) and 36 inch (High Flow) shroud openings allow high volumes of snow to be moved quickly and efficiently.
- Includes adjustable skid shoes and bolt-on replaceable wear-resistant tapered steel edge.
- Provides excellent visibility to working area.

\*Requires JCB Multi-function Controls

### SPECIFICATIONS

	SBL72	SBL78	SBL84	SBL72HF	SBL78HF	SBL84HF
Cutting Width - in. (mm)	72 (1829)	78 (1981)	84 (2134)	72 (1829)	78 (1981)	84 (2134)
Cutting Height - in. (mm)	25 (635)	25 (635)	25 (635)	36 (914)	36 (914)	36 (914)
Overall Height - in. (mm)	57 (1448)	57 (1448)	57 (1448)	74 (1880)	74 (1880)	74 (1880)
Overall Depth - in. (mm)	38 (965)	38 (965)	38 (965)	43 (1092)	43 (1092)	43 (1092)
Number of Auger Motors	Single	Single	Single	Dual	Dual	Dual
Auger Diameter - in. (mm)	14 (355)	14 (355)	14 (355)	18 (457)	18 (457)	18 (457)
Fan Diameter - in. (mm)	18 (457)	18 (457)	18 (457)	26 (660)	26 (660)	26 (660)
Hyd. Flow Range						
Min - GPM (lpm)	18 (68)	18 (68)	18 (68)	30 (113)	30 (113)	30 (113)
Max - GPM (lpm)	27 (102)	27 (102)	27 (102)	42 (159)	42 (159)	42 (159)
Operating pressure Range						
Min - PSI (bar)	2000 (138)	2000 (138)	2000 (138)	2500 (172)	2500 (172)	2500 (172)
Max - PSI (bar)	3340 (230)	3340 (230)	3340 (230)	3500 (241)	3500 (241)	3500 (241)
Weight - lbs (kg)	685	703	720	1160	1200	1240

## STUMP GRINDER

### SPECIFICATIONS

	SGS26	SG30HF
Overall Width - in (mm)	58 (1473)	58 (1473)
Overall Height - in. (mm)	37 (940)	37 (940)
Overall Length - in. (mm)	73 (1854)	73 (1854)
Below Ground Depth - in (mm)	10 (254)	12 (304)
Swing Arc - degrees	60°	60°
Vertical Lift Arc - degrees	43°	43°
Wheel Diameter	26 (660)	30 (762)
Number of teeth	28	28
Hyd. Flow Range		
Min - GPM (lpm)	16 (60)	25 (95)
Max - GPM (lpm)	22 (83)	40 (151)
Weight - lbs (kg)	720 (327)	795 (361)

### FEATURES

- 60 degrees of swing arc allows operator to cover 45" in a single cutting pass.
- Adjustable valve allows the operator to fine tune the speed control of the swing and lift functions for maximum performance.
- Able to grind stumps up to 12" below grade.
- The offset mounted arm design provides excellent visibility to the cutting area.
- Tooth design and pattern allows cutting in both side to side and vertical directions.
- Proven heavy-duty gearbox drive with torque arm motor support provides long motor and drive system life.
- The frame mounted grouser pads provide excellent stability while cutting.
- All functions easily controlled from inside the machine with the JCB Multi-Function controls.



\*Requires JCB Multi-function Controls

## TILLERS

### SPECIFICATIONS

	TLR66HF	TLR78HF
Working Width - in (mm)	66 (1676)	78 (1981)
Overall Width - in (mm)	76 (1930)	88 (2235)
Overall Height - in (mm)	35 (890)	35 (890)
Cutting Depth - in. (mm)	6 (152)	6 (152)
Number of Tines	32	40
Hyd. Flow Range		
Min - GPM (lpm)	29 (110)	29 (110)
Max - GPM (lpm)	44 (167)	44 (167)
Weight - lbs (kg)	1000 (454)	1300 (590)

### FEATURES

- The bi-directional operation allows you to till the ground in forward and reverse so you can complete the job in less time.
- Heavy Duty bi-directional tines till up to 6" deep.
- Heavy gauge front hood acts as a leveling board for tilled soil.
- The JCB tiller has a dual hitch design allowing center mount or offset mount for operating next to buildings or other objects.
- Available in 66 inch and 78 inch High Flow models.



## TREE SPADE

### FEATURES


- Three models to accommodate root ball diameters from 18" to 44" or tree calipers between 1" to 4.5".
- The inside frame design and low profile towers allows operation in confined areas.
- The 25 degree cutting angle and extended cutting depth produce several uniform root ball sizes with one set of blades.
- Overlapping blades ensure clean root cutting and support of the root ball.
- The wide gate opening allows operator to easily clear trees when engaging.
- Pointed, high tensile, abrasion resistant blades for less resistance when penetrating the soil.
- Blade towers incorporate high density synthetic slides that are self lubricating promoting long life.
- Produces root balls that fit industry standard wire baskets for balled and burlap tree harvesting.



### SPECIFICATIONS

	TS26	TS36	TS44
Overall Height (Blades Up) - in. (mm)	51 (1295)	64.5 (1638)	64.5 (1638)
Overall Height (Blades Down) - in. (mm)	53.5 (1359)	69 (1753)	69 (1753)
Shipping Height (Blades Removed) - in. (mm)	32 (813)	38 (965)	38 (965)
Frame Height - in. (mm)	22.5 (571)	22.5 (571)	22.5 (571)
Digging Depth - in. (mm)	22 (559)	31 (787)	31 (787)
Cutting Angle - degrees	25°	25°	25°
Transport Width (Gate Open) - in. (mm)	51 (1295)	66 (1676)	63 (1600)
Overall Width (Gate Closed) - in. (mm)	66.5 (1689)	88.5 (2248)	107 (2718)
Maximum Gate Opening - in. (mm)	29 (737)	40 (1016)	33 (838)
Overall Length - in. (mm)	64 (1626)	75 (1905)	68 (1727)
Transport Length - in. (mm)	63 (1600)	68 (1727)	69.5 (1765)
Maximum Leg Adjustment - in. (mm)	10.5 (267)	10.5 (267)	10.5 (267)
Number of Blades	3	3	4
Tree Ball Diameter - in. (mm)	18 - 26 (457-660)	24 - 36 (610-914)	30 - 44 (762-1118)
Tree Trunk Diameter - in. (mm)	1.5 - 2.5 (38 - 63)	2.0 - 3.5 (51-89)	3.0 - 4.5 (76-114)
Tree Ball Weight Range - lbs (kgs)	150 - 500 (68-227)	250 - 1000 (113-453)	1200 - 1400 (544-635)
Hyd Flow Requirement - gpm (lpm)	10 (38)	10 (38)	10 (38)
Minimum Operating Pressure - PSI (bar)	2250 (155)	2250 (155)	2250 (155)
Weight - lbs (kg)	1100 (499)	1500 (680)	1825 (828)

## TRENCHERS

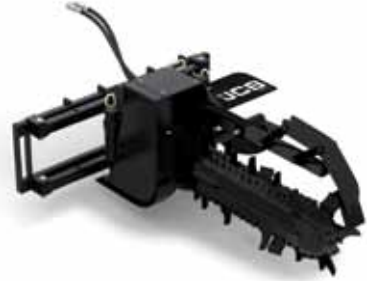

### FEATURES

- High torque hydraulic motors provide maximum digging power for excellent productivity.
- Heavy duty chain on standard flow models or planetary reduction on high flow model multiplies torque to the cutting chain.
- Boom is spring loaded to reduce shock loads to the hydraulic motor and carrier.
- Two inch pitch, 50,000 lb anti-back flex chain gives superior performance and long life.
- Self adjusting idler with sealed bearing is maintenance free.
- Two position, manual side shift feature allows trenching next to structures and single side spoil auger permits working in confined spaces.
- Replaceable headshaft driven auger for spoil removal.
- Pivoting crumber shoe and adjustable crumber bar aids in soil removal from trench.
- Replaceable, bolt on wear strips help protect boom in harsh conditions for extended life.

### SPECIFICATIONS

	TR36	TR48	TR48HF
Trench Depth @ 65° digging angle - in (mm)	36 (914)	48 (1219)	48 (1219)
Standard Trencher Chain width - in (mm)	6 (152)	6 (152)	6 (152)
Recommended trenching angle	65°	65°	65°
Headshaft height @ 65° trenching angle	8 (203)	8 (203)	8 (203)
Overall Length - in (mm)	73 (1854)	86 (2184)	86 (2184)
Overall Width - in (mm)	53 (1346)	53 (1346)	53 (1346)
Overall Height - in (mm)	32 (813)	32 (813)	32 (813)
Spoil Discharge Reach - in (mm)	18 (457)	18 (457)	18 (457)
Side Shift - Right of Center - in (mm)	17 (432)	17 (432)	17 (432)
Hyd. Flow Range			
Min - GPM (lpm)	14 (53)	14 (53)	29 (109)
Max - GPM (lpm)	22 (83)	22 (83)	35 (132)
Operating Pressure Range - psi (bar)	2,000 - 3,340 (138 - 230)	2,000 - 3,340 (138 - 230)	2,000 - 3,340 (138 - 230)
Weight - lbs (kg)	1040 (473)	1120 (508)	1120 (508)

## VIBRATORY ROLLERS



### FEATURES

- Produces up to 9,370 lbs of dynamic force for excellent compaction performance.
- Adjustable scraper blade between the frame and drum ensure smooth and uniform compaction.
- Hydraulic drive motors are protected and isolated to provide maximum performance and reliability.
- Drum oscillates +/- 15 degrees for compaction on uneven terrain.
- Dual hitch design allows center mount or offset mount for operating next to buildings or other objects.
- Available in smooth drum or pad foot versions.

### SPECIFICATIONS

	VR73S	VR84S	VR73P	VR84P
Drum Type	Smooth	Smooth	Padded	Padded
Overall Width - in (mm)	79 (2007)	90 (2286)	79 (2007)	90 (2286)
Drum Width - in (mm)	73 (1854)	84 (2134)	73 (1854)	84 (2134)
Overall Height - in (mm)	31 (787)	31 (787)	31 (787)	31 (787)
Overall Length - in (mm)	39 (990)	39 (990)	39 (990)	39 (990)
Drum Diameter - in (mm)	24 (610)	24 (610)	20 (508)	20 (508)
Dynamic Force - lbs (kg)	8550 (3878)	9370 (4250)	8550 (3878)	9370 (4250)
Vibrating Speed - vpm	2600	2600	2600	2600
Vibrating Weight - lbs (kg)	1290 (585)	1440 (653)	1225 (556)	1370 (621)
Drum Oscillation/Tilt - degrees	15°	15°	15°	15°
Maximum Hyd. Flow - gpm (lpm)	25 (95)	25 (95)	25 (95)	25 (95)
Operating Weight - lbs (kg)	2300 (1043)	2530 (1148)	2230 (1012)	2455 (1114)

Specification are based on 20 gpm (78 lpm) Hydraulic oil flow.



Connect with JCB



www.JCBdirt.com

JCB Headquarters – Savannah. 2000 Bamford Blvd., Savannah, Georgia, 31322,

Tel: (912) 447-2000 Web: www.jcbna.com

JCB reserves the right to change specifications without notice. Some machines shown within this brochure are fitted with optional equipment which may vary between dealerships.

