




DRUM WIDTH: 82.7 in (2,100 mm)    MAX OPERATING WEIGHT: 43,431 lb (19,700 kg) / 43,431 lb (19,700 kg)    MAX HORSEPOWER: 173 hp Tier III

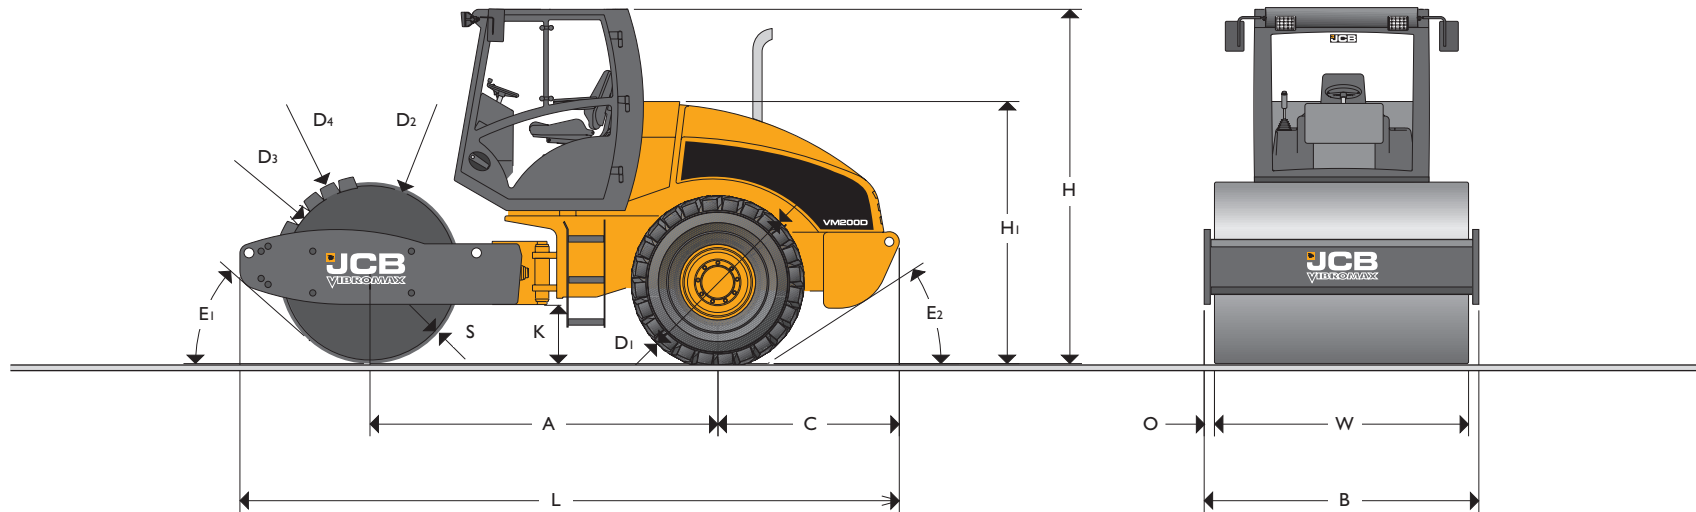

**STATIC DIMENSIONS**

Dimensions in inches (mm)		
A	Wheelbase	121.1 (3076)
B	Overall Width	89.4 (2270)
C	Axle to Rear Face	65.4 (1660)
D1	Wheel Diameter	59.8 (1520)
D2	Drum Diameter (smooth drum)	63.0 (1600)
D3	Inner Diameter Padfoot Drum	55.1 (1400)
D4	Outer Diameter Padfoot Drum	63.0 (1600)
H	Total Travel Clearance	117.5 (2985)
H1	Height to Top of Seat	88.4 (2245)
K	Ground Clearance	19.6 (497)
L	Total Travel Length	236.1 (5996)
O	Overhang	3.3 (85)
S	Drum Thickness	1.6 (40)
W	Drum Width	82.7 (2100)
E1	Front Departure Angle	35°
E2	Rear Departure Angle	29°

**OPERATING DATA**

		VM200D		VM200PD	
Operating Weight Max	lb (kg)	43,431 (19,700)		43,431 (19,700)	
Operating Axle Load Front / Rear	lb (kg)	26,015 (11,800) / 17,416 (7900)		26,015 (11,800) / 17,416 (7900)	
Operating Linear Load Front	lb/in (kg/cm)	315 (56.2)			
Vibration Stage		1	2	1	2
Exciter Frequency	vpm (HZ)	1740 (29)	2100 (35)	1740 (29)	2100 (35)
Nominal Amplitude	in (mm)	0.079 (2)	0.030 (0.75)	0.079 (2)	0.030 (0.75)
Centrifugal Force per Drum	lbf (kN)	83,179 (370)	46,086 (205)	83,179 (370)	46,086 (205)
Centrifugal Force / Drum Width	lbf/in (N/cm)	1006 (1762)	557 (976)	1006 (1762)	557 (976)
Compaction Depth up to	in (cm)	57 (145)	39 (100)	61 (155)	43 (110)
Working Speed (forward/reverse) Max	mph (km/h)	4.7 (7.6)		4.7 (7.6)	
Travel Speed (forward/reverse) Max	mph (km/h)	7.3 (11.8)		7.3 (11.8)	
Steering Lock Angle	degrees	±35		±35	
Vertical Oscillation	degrees	±15		±15	
Inner Turning Radius	in (m)	142 (3.6)		142 (3.6)	
Tires		23.1 - 26 / 8 PRAWT		23.1 - 26 / 12 Tractor Tread	
Number of Padfeet		132			
Height of Padfoot	in (mm)			3.9 (100)	
Gradeability up to	degrees (%)	24 (45)		24 (45)	

**ENGINE**

Six-cylinder, water-cooled, four-stroke, turbo-charged diesel engine with charge air cooler. Meets EPA Tier3/ Stage 3 emission regulations.

Make		Cummins
Model		QSB6.7
Engine Displacement	in <sup>3</sup> (cm <sup>3</sup> )	409 (6699)
Performance – DIN 6271	hp (kW)	173 (129)
Operating Speed	rpm (min <sup>-1</sup> )	2200 (2200)
Starting Device		Electric motor
Air Cleaner		Dry Cartridge Plus Safety Cartridge
Fuel Filter		Cartridge
Fuel Consumption	gal (l/h)	7.3 (27.7)
Emission Certification		EPA Tier III (EU Stage 3)

**PROPULSION**

Infinitely variable hydrostatic direct drive by variable displacement motor on rear axle and drum, Multidisc self-locking differential (NoSPIN).

**EXCITER DRIVE**

Electrically controlled hydrostatic direct drive on drum.

**EXCITER**

Single-shaft circular exciter with overturning weights.

**STEERING SYSTEM**

Servo assisted center articulation with vertical oscillation.

**SERVICE CAPACITIES**

Fuel	gal (l)	84.5 (320)
Engine oil (engine)	gal (l)	3.8 (14.5)
Gear oil (exciter)	gal (l)	3.2 (12)
Hydraulic oil	gal (l)	21.1 (80)
Coolant	gal (l)	5.0 (19)

**BRAKING SYSTEM**

**Service Brake:** Hydrostatic propulsion system.  
**Parking Brake:** Hydraulically released multi-disk brake on rear axle and drum drive.  
**Emergency Brake:** Electrically controlled, disk brake on rear axle and drum drive.

**ELECTRICAL SYSTEM**

Voltage	V	12
Battery Capacity	Ah	143
Alternator	A	Max 95

**INDICATORS AND SWITCHES**

Hour meter, fuel, engine temperature, engine oil pressure, battery charging current, hydraulic oil and air filter condition, parking brake, neutral position control lever, speed range selection frequency. Optional lighting, directional signals, hazard-warning lights.



## A GLOBAL COMMITMENT TO QUALITY

JCB's total commitment to its products and customers has helped it grow from a one-man business into one of the world's largest manufacturers of backhoe loaders, crawler excavators, wheeled excavators, telescopic handlers, wheeled loaders, dump trucks, rough terrain fork lifts, industrial fork lifts, mini/midi excavators, skid steer loaders and tractors.

By making constant and massive investments in the latest production technology, the JCB factories have become some of the most advanced in the world.

By leading the field in innovative research and design, extensive testing and stringent quality control, JCB machines have become renowned all over the world for performance, value and reliability.

And with an extensive dealer sales and service network in over 150 countries, we aim to deliver the best customer support in the industry.

Through setting the standards by which others are judged, JCB has become one of the world's most impressive success stories.



JCB Headquarters Savannah, 2000 Bamford Blvd, Savannah, GA 31322 Tel: (912) 447-2000 Fax: (912) 447-2299 [www.jcb.com](http://www.jcb.com)

JCB reserves the right to change design, materials and/or specifications without notice. Specifications are applicable to units sold in the United States and Canada. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.