FEATURES

- JCB general purpose buckets feature a rolled back shell for reduced spoil retention when emptying.
- A rolled top section gives maximum structural integrity.
- Optimum spacing of teeth gives maximum protection to the toeplate and improves penetration.
- Use of forged teeth and side cutters adds strength and durability to the corners, increasing the life of the bucket.
- Spring steel bushings prevent excessive wear to the bucket bosses.
- The addition of grease nipples enables regular lubrication to be carried out, further improving the working life of the bucket and pivot pins.

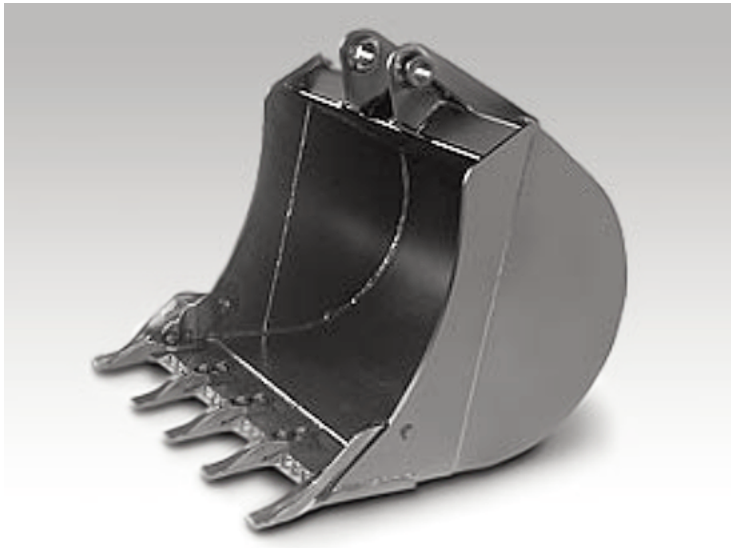

Part Number	Width	Capacity (cu yd)	JS130	JS145	JZ140	JS160	JS190	JS220 /XD	JS220 LR	JS260 /XD	JS330 /XD	JS460
328/00498	24”	0.57	•	•	•							
328/00499	30”	0.73	•	•	•							
328/00500	36”	0.89	•	•	•							
328/00501	42”	1.048	•	•	•							
328/00502	48”	1.2	•	•	•							
328/00510	24”	0.678				•	•					
328/00511	30”	0.847				•	•					
328/00512	36”	1.017				•	•					
328/00513	42”	1.186				•	•					
328/00509	48”	1.36				•	•					
328/00525	24”	0.787						•				
328/00526	30”	0.984						•				
328/00527	36”	1.18						•				
328/00528	42”	1.377						•				
328/00529	48”	1.574						•				
328/00530	54”	1.771						•				
328/00546	24”	0.902								•		
328/00547	30”	1.128								•		
328/00548	36”	1.354								•		
328/00549	42”	1.579								•		
328/00550	48”	1.805								•		
328/00551	54”	2.03								•		
328/00567	30”	1.258									•	
328/00568	36”	1.537									•	
328/00569	42”	1.816									•	
328/00570	48”	2.096									•	
328/00571	54”	2.375									•	
328/00572	60”	2.655									•	
328/00918	36”	1.79										•
328/00919	42”	2.088										•
328/00920	48”	2.387										•
328/00921	54”	2.685										•
328/00922	60”	2.984										•
328/00923	66”	3.3										•