




FEATURES

Features

- Standard cylinder guards protect all cylinder components
- Standard load check valve
- 1 1/4" cylinder pivot pins
- 1 1/4" x 24" patented grapple pins reduce torsional force
- Bucket edge drilled for FFC replaceable edge unless specified

Specifications	328/00634	328/00636
Overall Width	66 3/4"	72 3/4"
Overall Height (Open)	34"	34"
Overall Height (Closed)	19 3/4"	19 3/4"
Overall Depth	36"	36"
Weight	788 lb	835 lb

Part Number	160	170	180	180T	190	190T	1110	1110T
328/00634	•	•	•	•	•	•	•	•
328/00636			•	•	•	•	•	•

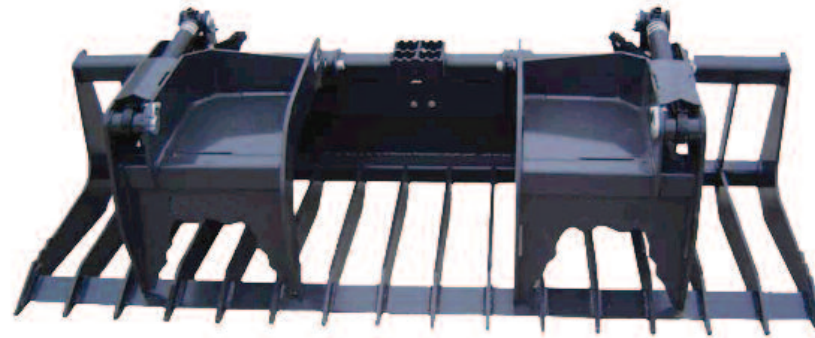

FEATURES

- 6" tine spacing
- Standard cylinder guards protect all cylinder components
- 1 1/4" cylinder pivot pins
- 1 1/4" x 24" patented grapple pins greatly reduce torsional force
- Standard load check valve
- 100,000 PSI yield strength tine material

Specifications	328/00642	985/00020
Overall Width	66 3/4"	72 3/4"
Grapple Open	17 3/8"	17 3/8"
Grapple Closed	16 1/2"	16 1/2"
Overall Depth	39"	39"
Weight	740 lb	775 lb
Number of Tines	12	14

Part Number	180	180T	190	190T	1110	1110T
328/00642	•	•	•	•	•	•
985/00020			•	•	•	•